


# 1 Installation


## Installation Environment:

Indoor use only.  
Avoid backlight, direct sunlight, and indirect sunlight.  
For Better recognition, there should be light source in or near the installation environment.  
The minimum bearing weight of the wall or other places should be 3 times heavier than the device weight.

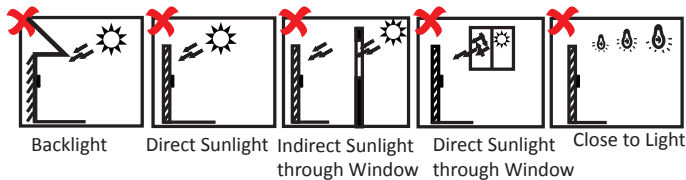


## Wall Mounting

1 Make sure the gang box is installed on the wall.




*i* Gang box is not supplied.

2 Secure the mounting plate on the gang box with the supplied screws (M4).  
Route the cable through the cable hole, wire the cables and insert the cables in the gang box.




3 Align the device with the mounting plate, and secure the device on the mounting plate with 1 supplied screw (M3).




## Base Mounting


1 Route the cable through the cable hole of the bracket.  
Align the bracket with the device rear panel.



2 Press the bracket with both hands. Make sure the rear panel of the device and the buckles of the bracket are aligned with each other. Slide and buckle the bracket along the arrow.

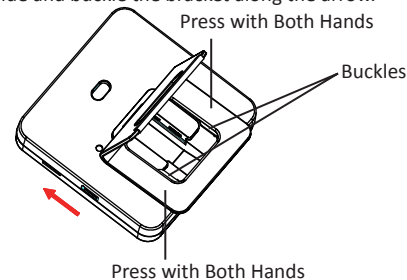

3 Slide to the end to complete the installation.



# DS-K1A340 Series Face Recognition Terminal

## Quick Start Guide

UD24079B

© 2021 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.  
This Manual is the property of Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision"), and it cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise expressly stated herein, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding the Manual, any information contained herein.

The Manual includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of this Manual at the Hikvision website (<https://www.hikvision.com/>). Please use this Manual with the guidance and assistance of professionals trained in supporting the Product.

Trademarks Acknowledgement  
HIKVISION and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.  
Other trademarks and logos mentioned are the properties of their respective owners.

LEGAL DISCLAIMER  
TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS MANUAL AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

YOU ACKNOWLEDGE THAT THE NATURE OF INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW, ESPECIALLY, YOU ARE RESPONSIBLE FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATER PREVAILS.  
Data Protection  
During the use of device, personal data will be collected, stored and processed. To protect data, the development of Hikvision devices incorporates privacy by design principles. For example, for device with facial recognition features, biometrics data is stored in your device with encryption method; for fingerprint device, only fingerprint template will be saved, which is impossible to reconstruct a fingerprint image. As data controller, you are advised to collect, store, process and transfer data in accordance with the applicable data protection laws and regulations, including without limitation, conducting security controls to safeguard personal data, such as, implementing reasonable administrative and physical security controls, conduct periodic reviews and assessments of the effectiveness of your security controls.


Scan the QR code to get the user manual for detailed information.



Use only power supplies listed in the user instructions:


Model	Manufacturer	Standard
ADS-26FSG-12 12024EPG	Shenzhen Honor Electronic Co.,Ltd	PG
MSA-C2000IC12.0-24P-DE	MOSO Technology Co.,Ltd	PDE
ADS-24S-12 1224GPG	Shenzhen Honor Electronic Co., Ltd.	PB

# 2 Appearance

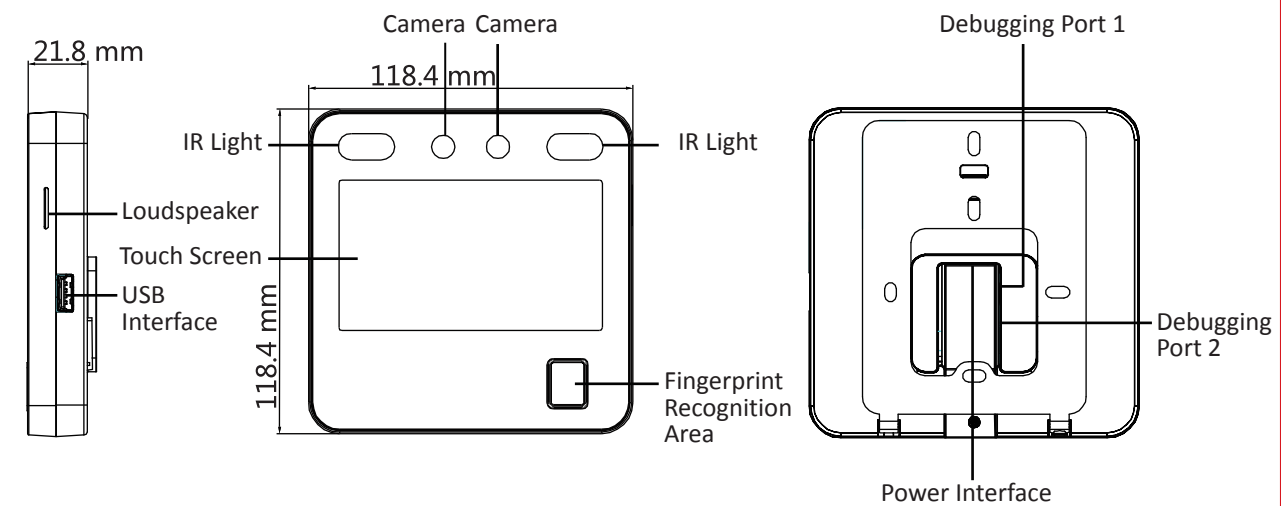

*i* The figures are for reference only.

# 3 Wiring

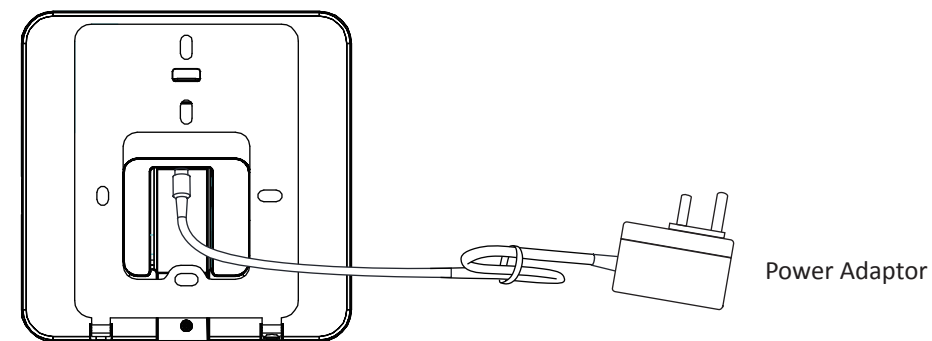

*i* Power on the device to operate.


## 4 Quick Operation

### ● Activation via Device

After powering on, you will enter the activation page.

#### Steps:

1. Create a password and confirm the password.
2. Tap **Activate** to activate the device.

 Characters containing admin and nmda are not supported to be set as activation password.



We highly recommend you to create a strong password of your own choosing (using a minimum of 8 characters, including at least three kinds of following categories: upper case letters, lower case letters, numbers, and special characters) in order to increase the security of your product. And we recommend you change your password regularly, especially in the high security system, changing the password monthly or weekly can better protect your product.


### ● Set Language

Select a language from the drop-down list.

### ● Set Application Mode

After activation, you should select an application mode.

Select **Indoor** or **Others** from the drop-down list and tap **OK**.



 If you install the device indoors near the window or the face recognition function is not working well, select **Others**.


### ● Privacy Settings

Set the privacy parameters, including the picture uploading and storage.

### ● Set Administrator


#### Steps:

1. (Optional) Edit the employee ID.
2. Enter the administrator's name and tap **OK**.
3. Select a credential to add. You can select face and fingerprint.
  - Add Face: Tap  to capture. And tap  to save.
  - Add Fingerprint: Tap the fingerprint icon, and add fingerprint according to the prompt.
4. Tap **OK**.

 Only the device with the fingerprint module supports the fingerprint functions.

## 5 Basic Operation


### ● Local Time and Attendance

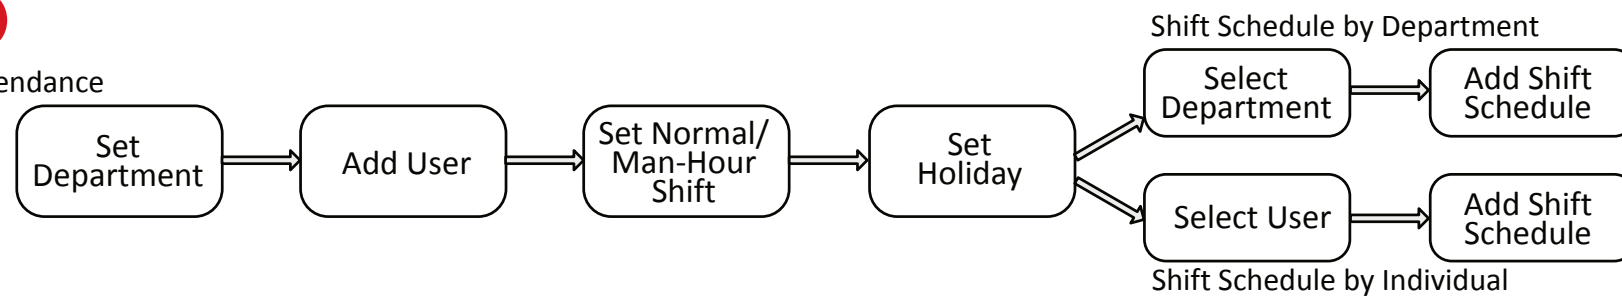


▶ Set Department: After logging in the device, tap **Department Management** and you can see the default department. Tap + to create a department. Select a department, and you can edit or delete it.

▶ Add User: After logging in the device, tap **User** -> +. Enter the user name, select a department, add face and fingerprint information, etc.

▶ Set Normal Shift: It is applicable to the normal attendance situation. You can set the attendance rule and the attendance checking times. After logging in the device, tap **Local T&A** -> **Shift Management** -> **Normal Shift Management**.  
Attendance Rule: Tap **Attendance Rule** to enter the page. Take the following picture as an example to describe the rules.

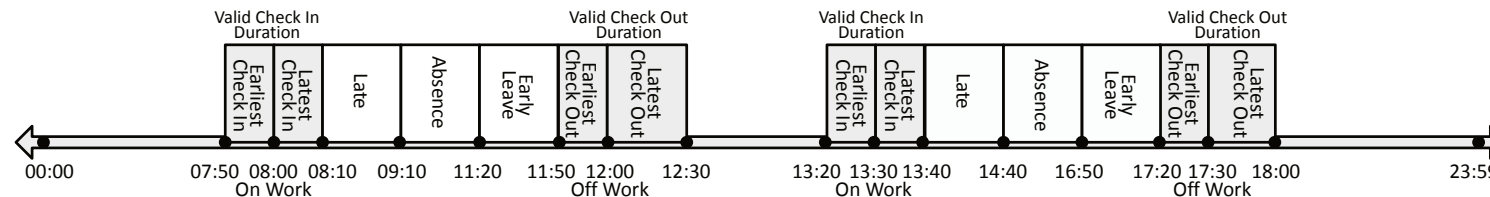

**Advanced Check In Time:** Set the earliest check in time. For example, if set the on work time as 8:00, and set the parameter as 10 min, the earliest check in time will be 7:50. Checking in at and earlier than 7:49 will be marked as invalid.


 By default, if set as 0 min, the valid check in time starts from 00:00.

**Latest Check In Time:** Set the latest check in time. For example, if set the on work time as 8:00, and set the parameter as 10 min, the latest check in time will be 8:10. Checking in at and later than 8:11 will be marked as late or absence.

**Late Time:** The late time is N min after the latest check in time. For example, if set the latest check in time as 8:10, and set the parameter as 60 min, checking in at and later than 9:11 will be marked as absence. 8:10 to 9:10 will be marked as late.

**Earliest Check Out Time:** Set the earliest check out time. For example, set the off work time as 17:30 and set the parameter as 10 min, the earliest check out time will be 17:20. Checking out at or earlier than 17:19 will be marked as invalid.

**Latest Check Out Time:** Set the latest check out time. For example, set the off work time as 17:30 and set the parameter as 30 min, the latest check out time will be 18:00. Checking out at or later than 18:01 will be marked as invalid.

 By default, if set as 0 min, the valid check out time ends at 23:59:59.

**Absence Time (Early Leave):** The early leave time is N min earlier than the check out time. For example, if set the earliest check out time as 17:20, and set the parameter as 30 min, checking out between 16:50 and 17:20 will be marked as early leave.

▶ Set Man-Hour Shift: It is applicable to the situation with flexible working hours. After logging in the device, Tap **Local T&A** -> **Shift Management** -> **Man-Hour Shift Management** -> +. Edit the shift name, work duration, latest on-work time, and break time.


▶ Set Holiday: After logging in the device, tap **Local T&A** -> **Holiday Management** -> +. Create a holiday name and set a holiday duration. Select a holiday and you can edit or delete it.


▶ Shift Schedule by department: **All** persons in the department use the same shift schedule to take attendance. After logging in the device, Tap **Local T&A** -> **Shift Schedule by Department**. Select a department, add shift schedule, and select holiday.  
Shift Schedule by individual: Take attendance according to individual's conditions. Tap **Local T&A** -> **Shift Schedule by Individual**. Tap + to add shift schedule and select holiday.

### ● Other Settings

▶ Restore to Default: All parameters, except for the communication settings, remotely imported user information, will be restored to the default settings. The system will reboot to take effect.

▶ Restore to Factory: All parameters will be restored to the factory settings. The system will reboot to take effect.

▶ Forgot Password (Via Device): Long tap on the initial page for 3 s and slide to the left/right by following the gesture and log in the page. Tap  in the pop-up admin authentication page. Tap **Forget Password** in the upper right corner of the page. Plug USB flash drive into the USB interface. Tap **Export File**, and contact the technician to get the key, and enter the key in the export file. Tap **Import File** to import the file with the key to the device. Follow the prompts to reset the password.

▶ Forgot Password (Via iVMS-4200 Client Software): Make sure the device IP address and the PC's are in the same IP segment. Enter **Maintenance and Management** and click **Online Device**. Find the device and click . Click **Generate** and click **Download** to send the QR code to technical support. Receive a new code and import it to the client software. Create a new password and confirm it. Click **Save**.

## Safety Instruction

### ⚠ Warning

- In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region.
- Do not connect several devices to one power adapter as adapter overload may cause over-heat or fire hazard.
- If smoke, odors or noise rise from the device, turn off the power at once and unplug the power cable, and then please contact the service center.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.
- 1. Do not ingest battery. Chemical burn hazard!
- 2. This product contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- 3. Keep new and used batteries away from children.
- 4. If the battery compartment does not close securely, stop using the product and keep it away from children.
- 5. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- 6. CAUTION: Risk of explosion if the battery is replaced by an incorrect type.
- 7. Improper replacement of the battery with an incorrect type may defeat a safeguard (for example, in the case of some lithium battery types).
- 8. Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may result in an explosion.
- 9. Do not leave the battery in an extremely high temperature surrounding environment, which may result in an explosion or the leakage of flammable liquid or gas.
- 10. Do not subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.
- 11. Dispose of used batteries according to the instructions

### ⚠ Caution

- Do not drop the device or subject it to physical shock, and do not expose it to high electromagnetic radiation. Avoid the equipment installation on vibrations surface or places subject to shock (ignorance can cause equipment damage).
- Do not place the device in extremely hot (refer to the specification of the device for the detailed operating temperature), cold, dusty or damp locations, and do not expose it to high electromagnetic radiation.
- Exposing the equipment to direct sun light, low ventilation or heat source such as heater or radiator is forbidden (ignorance can cause fire danger). The device cover for indoor use shall be kept from rain and moisture.
- Exposing the equipment to direct sun light, low ventilation or heat source such as heater or radiator is forbidden (ignorance can cause fire danger).
- Please use a soft and dry cloth when clean inside and outside surfaces of the device cover, do not use alkaline detergents.
- Biometric recognition products are not 100% applicable to anti-spoofing environments. If you require a higher security level, use multiple authentication modes.
- The serial port of the equipment is used for debugging only.
- Wall Mounting: Install the equipment according to the instructions in this manual. To prevent injury, this equipment must be securely attached to the floor/wall in accordance with the installation instructions.
- Improper use or replacement of the battery may result in hazard of explosion. Replace with the same or equivalent type only. Dispose of used batteries according to the instructions provided by the battery manufacturer.
- This bracket is intended for use only with equipped devices. Use with other equipment may result in instability causing injury.
- This equipment is for use only with equipped bracket. Use with other (carts, stands, or carriers) may result in instability causing injury.