


# Standard panic lock narrow stile

## The versions: Data & dimensions

Technical specifications	
Backset	30, 35, 40, 45 mm
Distance	92 mm (prepared for Euro profile cylinder), 94 mm (prepared for Swiss round cylinder)
Face plate	U-shaped face plate: U6 x 24 mm Flat face plate: F3 x 20 mm, F3 x 24 mm, R3 x 20 mm, R3 x 24 mm
Face plate length	270, 320, 370 mm (depending on the version)
Material face plate	Stainless steel
Latch	DIN L/R (symmetrical face plate)
Bolt throw	20 mm, single rotation
Handle follower	9 mm
Standards	EN 179, EN 1125
Available as an option	5 mm latch bolt and deadbolt protrusion

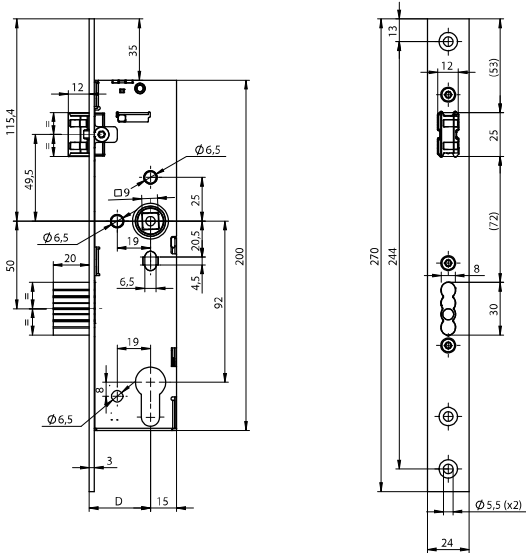


### Standard panic lock N16XX

OneSystem panic lock N16XX according to EN 179 and EN 1125 for narrow stile doors.

Approved for fire barriers according to EN 1634 / product-specific environmental product declaration (EPD) according to EN 15804 with article-specific parameters / tested for 1,000,000 cycles and 300 kg door weight.

Panic function	Single-leaf	Double-leaf
B	N1600	N1602
C	N1604	N1606
D	N1608	N1610
E	N1612	N1614
P	N1616	-

Further accessories can be found under accessories.

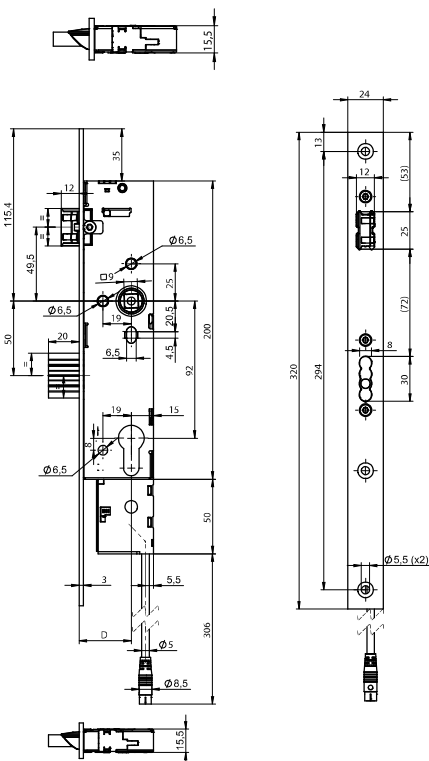

### Standard panic lock with monitoring function

- As above, but with integrated bus system based on ASSA ABLOY Hi-O-Standard
- Simplified connection to various ASSA ABLOY products by means of a 5-wire cable on the lock
- With integrated sensors for monitoring of
  - Outer handle > 5° operated
  - Inner handle > 5° operated
  - Outer handle coupled = on/off
  - Deadbolt monitoring = unlocked/locked
  - Cylinder monitoring

Order code as above but with monitoring function.

Accessories	Order no.
Connecting cable 10m	N 5 9 5 5 1 0 1 0 0 0 0 0 0
IO module	N 5 9 5 0 0 0 0 0 0 0 0 0 0